




HORNG YU ELECTRIC CO., LTD.

Flexible Braided Connector

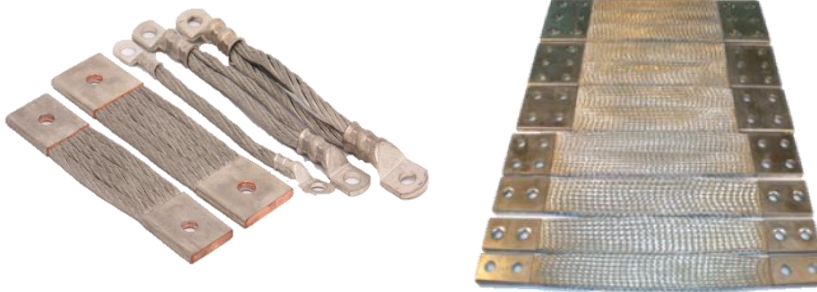

Features

Conductivity above 99.9%

Shock Absorption

Flexible

Twistable

Application

Transformer lead to Terminal

Generator lead to Terminal

Busway lead to Terminal

Movable parts of switch equipment


Circuit in narrow Space

Connect vibration of electric equipment




HORNG YU ELECTRIC CO., LTD.

Product pictures

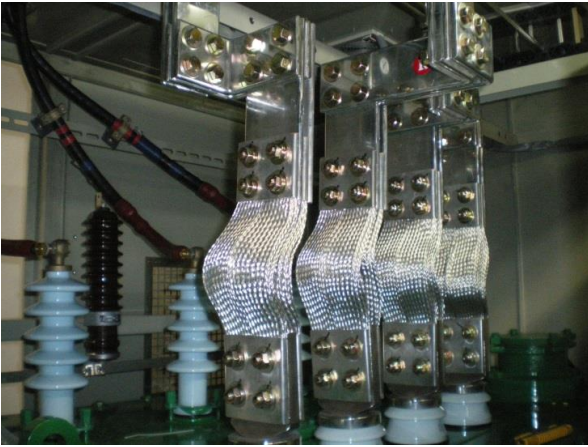


Transformer lead to Terminal

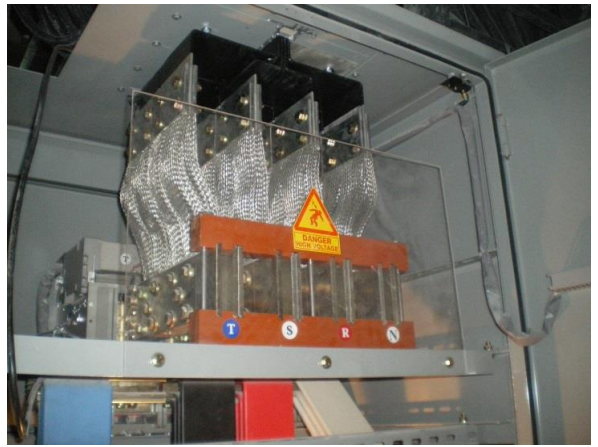

Bus Way lead to Terminal



Generator lead to Terminal

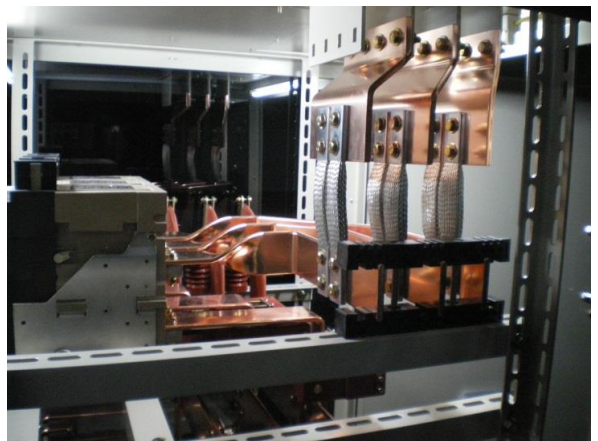


Main Circuit in narrow space




Specification


Standard Specification

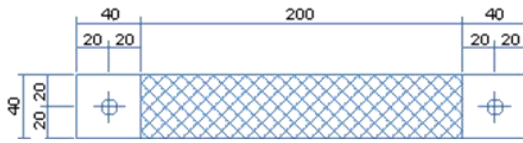

TYPE : A280			
Rate current	Thickness	Length	Hole diameter
715 A	10 mm	280 mm	14Φ

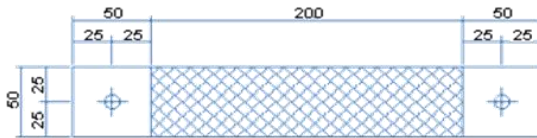


TYPE : B300			
Rate current	Thickness	Length	Hole diameter
875 A	10 mm	300 mm	14Φ

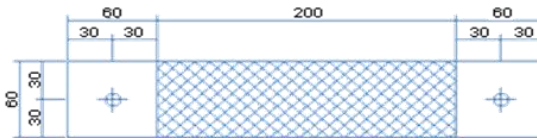


TYPE : C320			
Rate current	Thickness	Length	Hole diameter
1000 A	10 mm	320 mm	14Φ




TYPE : D360			
Rate current	Thickness	Length	Hole diameter
1300 A	10 mm	360 mm	14Φ

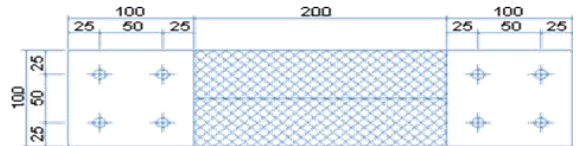

TYPE : E400			
Rate current	Thickness	Length	Hole diameter
1650 A	10 mm	400 mm	14Φ

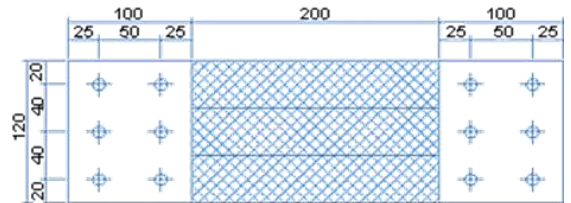

TYPE : F400			
Rate current	Thickness	Length	Hole diameter
1920 A	10 mm	400 mm	14Φ

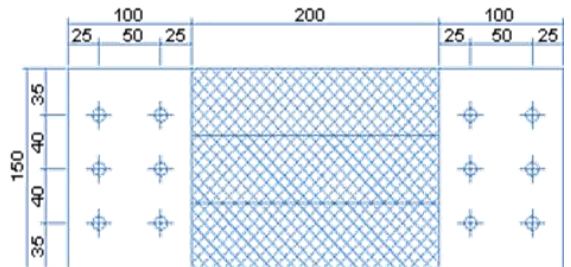

TYPE : G400			
Rate current	Thickness	Length	Hole diameter
2300 A	10 mm	400 mm	14Φ

Note : Customized service is available.